


Item no. 7424484



Ready-to-mount trunking unit with three self-locking blanking covers for cable laying, consisting of the trunking base (floor trough with side and floor covering guide profiles) and trunking lid. Floor trough with holding shackles for self-contacting mounting of dividers. The scope of supply contains six height-adjustable wall fixing brackets, six screed anchors and three cover joint supports (for nominal trunking widths 200 and 300) or three height-adjustable cover joint supports (for nominal trunking widths 400, 500 and 600). Trunking lid screwed down when delivered.

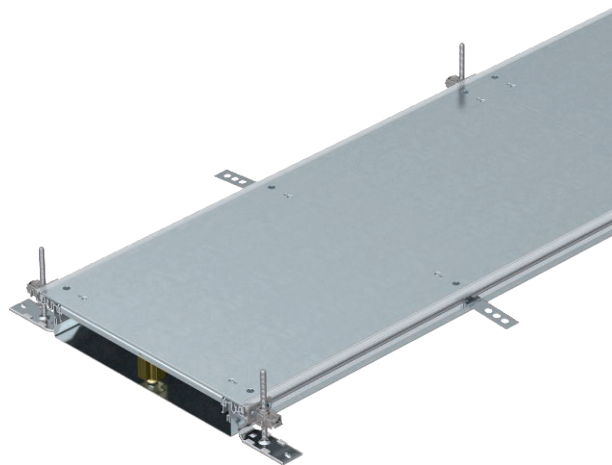

St	Steel
FS	Strip galvanised

Master data

Item no.	7424484
Type	OKA-W4006050R
Description 1	Flushfloor trunking unit
Description 2	blank, locking
Dimension	2400x400x60
Material	Steel
Material symbol	St
Surface	Strip galvanised
Surface to DIN	DIN EN 10346
Surface symbol	FS
Smallest sales unit (VG)	2 m
Weight	1.816,70 kg/100 m

Technical data

Length	2.400,00 mm
Width	400,00 mm
Covers	3,00 pc.
Mounting opening cover	<input type="checkbox"/>
Number of planned flush-mount units	3
Number of compartments	3,00 pc.
Floor plate	<input checked="" type="checkbox"/>
Seal installation option	<input checked="" type="checkbox"/>
Cover fastening, locking	<input checked="" type="checkbox"/>
Installation opening for on-floor tank	<input type="checkbox"/>
Decouplable	<input type="checkbox"/>
Suitable for expansion joint	<input type="checkbox"/>
Mesh wall	<input type="checkbox"/>
Trunking height	60,00 - 110,00 mm
Cover material thickness	4,00 mm
Minimum screed height	60
With overhang	<input checked="" type="checkbox"/>
With separating retainer	<input type="checkbox"/>
With connection opening	<input type="checkbox"/>
With equipotential bonding	<input type="checkbox"/>
Mounting opening	Without

Item no. 7424484

Technical data

Mounting opening	Without
Height-adjustment range	60,00 - 110,00 mm
Removable cover	<input checked="" type="checkbox"/>
Separating retainer fastening	Plug