


# Technical data sheet

## Sprint screw, with Torx

Item no. 3198018

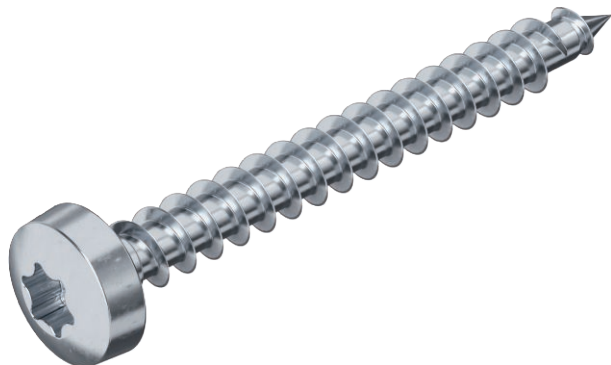

Hardened steel, electrogalvanised and Hostaflon-coated. Pan head with T bit (Allen head), sizes Ø 3 mm T10, Ø 3.5 mm T15, Ø 4 and 4.5 mm T20, Ø 5 mm T25.

The use of Sprint screws leads to considerably reduced screw-in times compared with standard screws. This noticeable advantage comes from the point with the first thread, which leads on to the double thread beyond.

Areas of use: wood, chipboard, Rigips panels, plastic anchors.




St	Steel
G	Electrogalvanised

### Master data

Item no.	3198018
Type	4758T 3.5x20
Description 1	Sprint screw
Description 2	panhead, T-drive
Dimension	3,5x20mm
Material	Steel
Material symbol	St
Surface	Electrogalvanised
Surface to DIN	EN ISO 19598 / EN ISO 4042
Surface symbol	G
Smallest sales unit (VG)	200 Piece
Weight	0,11 kg/100 pc.

### Technical data

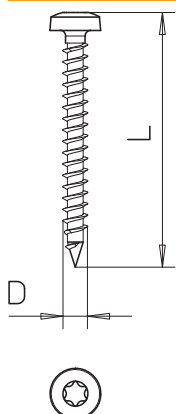

Length	20,00 mm
Dimension L	20,00 mm
Dimension D	3,50 mm
Hardened	<input checked="" type="checkbox"/>
Head diameter	6,50 mm
Head shape	Panhead
Screw system	Torx
Thickness	3,50 mm
Two-compartment	<input checked="" type="checkbox"/>