

Technical data sheet

Junction box, B 12 M, with thread

Item no. 2002523



Protection rating IP54, nominal voltage 660 V, nominal cross-section 16 mm², two fastening holes for screws up to 6 mm Ø on the outside of the box. Four cover screws, 10 break-out entries with thread M25 x 1.5.
Clear internal dimensions: 178x126x57 mm




UF Duroplast, Aminoplast, type 131.5

Additional product text 1 B 12 empty: without terminal strip

Master data

Item no.	2002523
Type	B 12 M
Description 1	Junction box
Dimension	178x144x71
Colour	Light grey
RAL number	7035
Material	Duroplast, Aminoplast, type 131.5
Material symbol	UF
Smallest sales unit (VG)	1 Piece
Weight	56,32 kg/100 pc.

Technical data

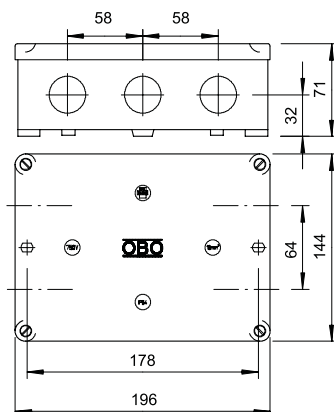

Length	144,00 mm
Width	196,00 mm
Height	71,00 mm
Clear internal dimensions	178x126x57 mm
Dimension LxWxH	144x196x71 mm
Dimension	196 x 144 x 71 mm
Expandable	☐
No. of entries	10
Type of entry	Cable
Type of housing penetration	Thread and pre-marking
Measured insulation voltage Vi	660,00 V
Cover	Not transparent
Cover fastening	Screwed
Entries	10 break-out entries with thread M25 x 1.5
Entry from rear	☐
Explosion-tested version	☐
Flame-resistant	Acc. to VDE 0471/DIN 695 Part 2-1, test temperature 750°C
Shape	Rectangular
Function maintenance (ETIM)	Without
For Ex zone	Without

Technical data sheet

Junction box, B 12 M, with thread

Item no. 2002523



Technical data

For Ex zone gas	Without
For Ex zone dust	Without
For pipe diameter	25 mm
Halogen-free	☒
With screening	☐
With cover	☒
Nominal cross section	16,00 mm ²
Nominal voltage	660,00 V
Protection rating	IP54
Sealable	☒
Impact-resistant	☐
Transparent lid	☐
Weatherproof	☐