


Technical data sheet

CL2008 profile rail, slot 11 mm, perforated, breakable

Item no. 1106120

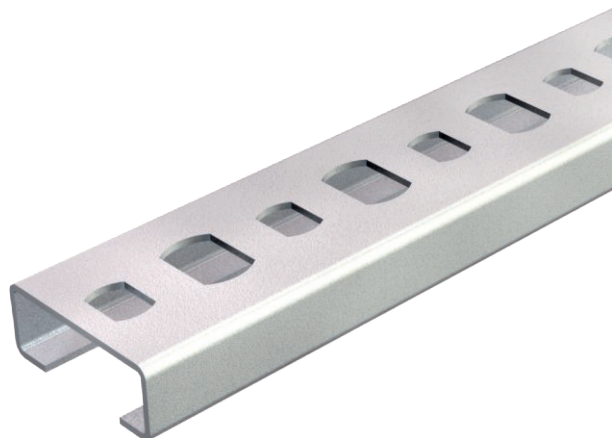

Light-duty C profile rail for cable routing, in conjunction with series clips or clamp clips with N foot. Can also be used in building of control cabinets.




St	Steel
FS	Strip galvanised

Additional product text, instruction	Perforated, on "A" can be broken every 10 cm.
--------------------------------------	---

Master data

Item no.	1106120
Type	CL2008BP2000FS
Description 1	Profile rail
Description 2	perforated, slot 11mm
Dimension	2000x20x8
Material	Steel
Material symbol	St
Surface	Strip galvanised
Surface to DIN	DIN EN 10346
Surface symbol	FS
Smallest sales unit (VG)	2 m
Weight	21,10 kg/100 m

Technical data

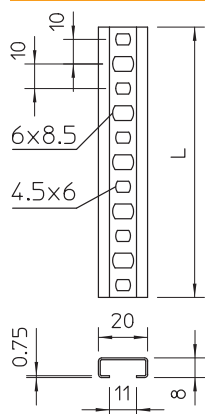

Length	2.000,00 mm
Width	20,00 mm
Height	8,00 mm
Dimension L	2.000,00 mm
Breakable	☒
lampDimension WxH	20 x 8 mm
Version	Single profile
Type of perforation	Perforated back
Drill hole spacing, centre	10,00 mm
Bundle	20,00 m
Suitable for maintaining electrical function	☐
Material thickness	0,75 mm
With perforation	☒
With tothing	☐
Profile shape	C profile
Slot width	11,00 mm
Static value A	
Static value Iy	
Static value Iz	
Static value Wy	

Technical data sheet

CL2008 profile rail, slot 11 mm, perforated, breakable

Item no. 1106120



Technical data

Static value Wz