

# Technical data sheet

## Hot-dip galvanised steel bend, without thread

Item no. 2046819



90° bend with moulded sleeves, for electrical installation pipes according to EN 61386-1. With burr-free inner wall.




|           |                    |
|-----------|--------------------|
| <b>St</b> | Steel              |
| <b>FT</b> | Hot-dip galvanised |

### Master data

|                          |                      |
|--------------------------|----------------------|
| Item no.                 | 2046819              |
| Type                     | SBN32 FT             |
| Description 1            | Conduit plug-in bend |
| Description 2            | without thread       |
| Dimension                | ø32mm                |
| Material                 | Steel                |
| Material symbol          | St                   |
| Surface                  | Hot-dip galvanised   |
| Surface to DIN           | DIN EN ISO 1461      |
| Surface symbol           | FT                   |
| Smallest sales unit (VG) | 20 Piece             |
| Weight                   | 41,00 kg/100 pc.     |

### Technical data

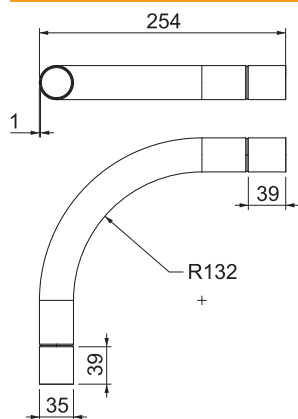

|                                    |                                     |
|------------------------------------|-------------------------------------|
| Dimension A                        | 86,50 mm                            |
| Dimension B                        | 254,00 mm                           |
| Dimension D                        | 32,70 mm                            |
| Dimension M                        | M32                                 |
| Dimension R                        | 150,00 mm                           |
| Dimension t                        | 1,20 mm                             |
| Dimension l                        | 40,00 mm                            |
| Version                            | Connector                           |
| Size                               | 32                                  |
| For nominal pipe diameter          | 32,00 mm                            |
| Flexible                           | <input type="checkbox"/>            |
| Halogen-free                       | <input type="checkbox"/>            |
| With inspection opening and lid    | <input type="checkbox"/>            |
| With sleeve                        | <input checked="" type="checkbox"/> |
| Polished surface                   | <input type="checkbox"/>            |
| Brushed surface                    | <input type="checkbox"/>            |
| max. permitted ambient temperature | -45,00 - 400,00 °C                  |
| Angle of the bend                  | 90,00 °                             |
| Two-part                           | <input type="checkbox"/>            |