


Technical data sheet

Electrogalvanised steel pipe, with thread

Item no. 2046866

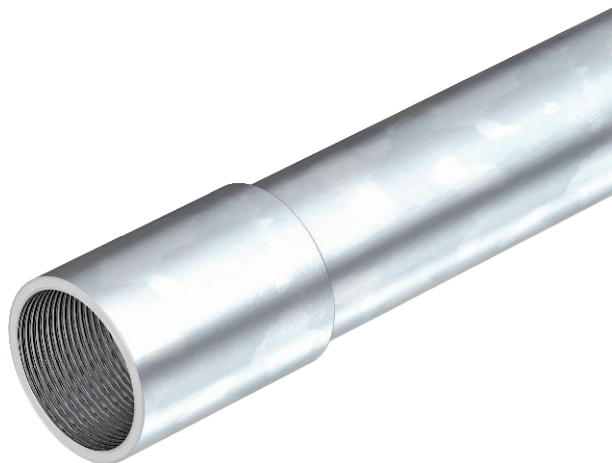

Electrical installation pipe according to EN 61386-1 with threaded ends to EN 60423 for mechanical protection of cables.
With burr-free inner wall. One coupling is already screwed onto each pipe.




St	Steel
G	Electrogalvanised

Master data

Item no.	2046866
Type	SM50W G
Description 1	Threaded conduit
Description 2	with threaded coupler
Dimension	M50x1,5,3000
Material	Steel
Material symbol	St
Surface	Electrogalvanised
Surface to DIN	EN ISO 19598 / EN ISO 4042
Surface symbol	G
Smallest sales unit (VG)	15 m
Weight	190,00 kg/100 m

Technical data

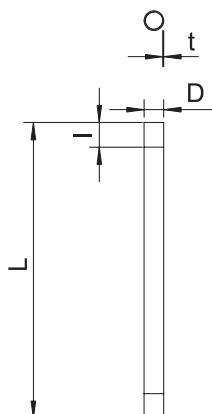

Length	3.000,00 mm
Dimension D	50,00 mm
Dimension L	3.000,00 mm
Dimension M	M50
Dimension t	1,50 mm
Dimension l	25,00 mm
Surface-mounted	☒
Pipe version	Rigid with thread
Outer-Ø	50,00 mm
Concrete installation	☒
Pressure resistance class	Very heavy (Class 5)
Thread	M50x1,5
Cavity wall installation	☒
Installation on wood	☒
Installation under the ground	☐
Installation outdoors	☐
Machines and system installation	☐
Polished surface	☐
Brushed surface	☐
max. permitted ambient temperature	-45,00 - 400,00 °C

Technical data sheet

Electrogalvanised steel pipe, with thread

Item no. 2046866



Technical data		
	Underfloor installation (bitumen, hot asphalt)	☒
	Underfloor installation (screed)	☒
	Concealed	☒
Classification for electrical pipe standards		
	Classification code	55571