

Technical data sheet

T100 junction box, 2 Modul 45 sockets in cover, 1-pin

Item no. 2007821



Junction box for the connection of cables indoors and in protected outdoor areas. Rectangular design with knock-out entries to the sides and knock-out entries in the bottom. Suitable for wall and ceiling mounting and on mounting panels. With the option of fastening inside and to mount via the corner domes. Cover with quick lock, sealable with retainer and 2 Modul45 sockets. Made from halogen-free materials.

Junction box according to DIN EN 60670. Flame-resistant to DIN EN 60695/2/11, test temperature 650 °C.




PP Polypropylene

Additional product text 2 | Clear internal dimensions: 136x102x57 mm

Master data

Item no.	2007821
Type	T 100 2MSD WS
Description 1	Junction box
Description 2	with 2 Schuko sockets 33° wh.
Dimension	150x116x67
Colour	Light grey
RAL number	7035
Material	Polypropylene
Material symbol	PP
Smallest sales unit (VG)	1 Piece
Weight	25,85 kg/100 pc.

Technical data

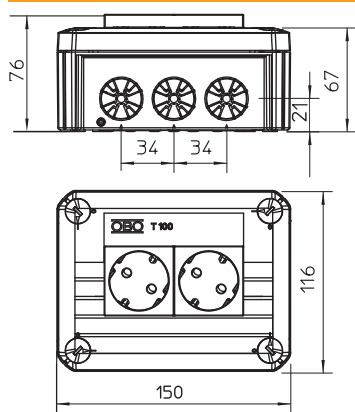

Length	150,00 mm
Width	116,00 mm
Height	67,00 mm
Clear internal dimensions	136x102x57 mm
Dimension LxWxH	150x116x67 mm
Dimension	150x116x67 mm
Expandable	☒
No. of entries	10
Type of entry	Cable
Type of entry	Strain relief entries for direct penetration
Type of housing penetration	Pre-marking
Version	2 sockets, 33° white
Measured insulation voltage Vi	500,00 V
Equipment	Other
Cover	Not transparent
Cover fastening	Screwed
Entries	10
Entry from rear	☒
Explosion-tested version	☐


Technical data sheet

T100 junction box, 2 Modul 45 sockets in cover, 1-pin

Item no. 2007821



Technical data

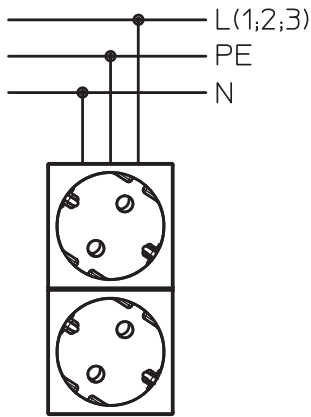

Flame-resistant	acc. to VDE 0471/DIN 695 Part 2-1, test temperature 750°C
Shape	Rectangular
Function maintenance (ETIM)	Without
For Ex zone	Without
For Ex zone gas	Without
For Ex zone dust	Without
Halogen-free	☒
With screening	☐
with lid	With four lid quick-release locks
With cover	☒
Installation type	Surface-mounted
Nominal cross section	2,50 mm ²
Nominal voltage	500,00 V
Protection rating	IP30
Protection rating	IP30
Sealable	☒
max. permitted ambient temperature	-5,00 - 60,00 °C
Transparent lid	☐
Weatherproof	☐