

Technical data sheet

CMS3518 profile rail, slot 17 mm, FS, perforated

Item number: 1104435



Central C profile rail for cable routing, in conjunction with clamp clips with a hammerhead foot. Can also be used as suspension construction for cable support systems.



St Steel

FS Strip galvanized

Master data

Item number	1104435
Type	CMS3518P0900FS
Description 1	Profile rail
Description 2	perforated, slot 17mm
Manufacturer	OBO
Dimension	900x35x18
Material	Steel
Surface	Strip galvanized
Surface standard	DIN EN 10346
Smallest sales unit	10
Unit of quantity	Piece
Weight	88.02 kg
Weight unit	kg/100 pc.
CO2 Footprint (GWP) Cradle-to-Gate	2,2179 kg CO2e / 1 Piece


Technical data sheet

CMS3518 profile rail, slot 17 mm, FS, perforated



Item number: 1104435

Dimensions

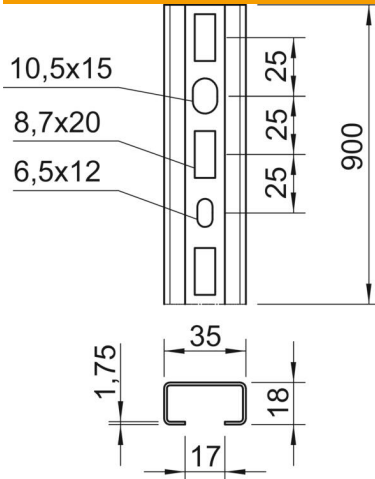

Length	900 mm
Width	35 mm
Height	18 mm
Dimension L	900 mm

Technical data

Breakable	no
Type of perforation	Perforated back
Version for	Single profile
Drill hole spacing, centre	25 mm
Maintain electrical functions	yes
Material thickness	1.75 mm
With perforation	yes
With tothing	no
Profile shape	C profile
Rustproof steel, pickled	no
Slot width	17 mm
Static value A	1.17 cm ²
Static value I _y	0.52 cm ⁴
Static value I _z	0.53 cm ⁴
Static value W _y	2.33 cm ³
Static value W _z	1.33 cm ³