

Technical data sheet

CML3518 profile rail, slot 17 mm, FT, perforated

Item number: 1104568



Central C profile rail for cable routing, in conjunction with clamp clips with a hammerhead foot. Can also be used as suspension construction for cable support systems.




St	Steel
FT	Hot-dip galvanised

Master data

Item number	1104568
Type	CML3518P1000FT
Description 1	Profile rail
Description 2	perforated, slot 17mm
Manufacturer	OBO
Dimension	1000x35x18
Material	Steel
Surface	Hot-dip galvanised
Surface standard	DIN EN ISO 1461
Smallest sales unit	10
Unit of quantity	Metre
Weight	73.6 kg
Weight unit	kg/100 m
CO2 Footprint (GWP) Cradle-to-Gate	1,7217 kg CO2e / 1 Meter

Dimensions

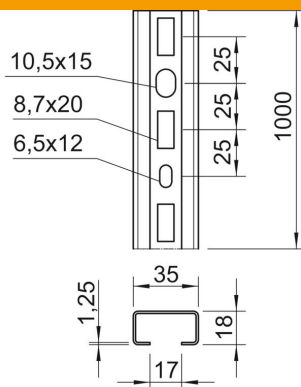

Length	1,000 mm
Width	35 mm
Height	18 mm
Dimension L	1,000 mm

Technical data sheet

CML3518 profile rail, slot 17 mm, FT, perforated

Item number: 1104568



Technical data

Breakable	no
Type of perforation	Perforated back
Version for	Single profile
Maintain electrical functions	yes
Material thickness	1.25 mm
With perforation	yes
With tothing	no
Profile shape	C profile
Rustproof steel, pickled	no
Slot width	17 mm
Static value A	0.88 cm ²
Static value I _y	0.41 cm ⁴
Static value I _z	1.81 cm ⁴
Static value W _y	0.41 cm ³
Static value W _z	1.03 cm ³