

# Technical data sheet

## Clamp clip, single, FT plastic pressure trough

Item number: 1175211



Suitable for all C profile rails with slot width 18 mm and 22 mm.

Polypropylene pressure trough, halogen-free, colour light grey RAL 7035.



**St** Steel

**FT** Hot-dip galvanised

### Master data

Item number	1175211
Type	2056U 22 FT
Description 1	Clamp clip
Manufacturer	OBO
Dimension	16-22mm
Material	Steel
Surface	Hot-dip galvanised
Surface standard	DIN EN ISO 1461
Smallest sales unit	100
Unit of quantity	Piece
Weight	3.223 kg
Weight unit	kg/100 pc.
CO2 Footprint (GWP) Cradle-to-Gate	0,0754 kg COe / 1 Piece


# Technical data sheet

## Clamp clip, single, FT plastic pressure trough

Item number: 1175211



### Dimensions

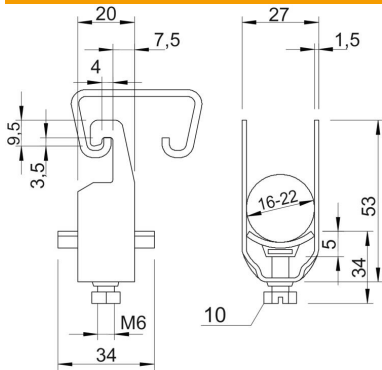

Dimension A	20 mm
Dimension B	27 mm
Dimension C	34 mm
Dimension G (mm)	M6
Dimension H	53 mm
Dimension L	34 mm
Dimension t	1.5 mm
Dimension x	5 mm

### Technical data

Number of cables/pipes	1
for 1 cable H	53 mm
for 1 cable L	34
for 2 cable H	77 mm
for 2 cable L	47 mm
for 3 cable H	101 mm
for 3 cable L	47 mm
For pipe diameter, max.	20 mm
For pipe diameter, min.	20 mm
for rail with slot width (with interval), max.	22 mm
for rail with slot width (with interval), min.	18 mm
Halogen-free	yes
Max. Tightening torque	3 Nm
With plastic trough	yes
With metal trough	no
Mounting type	Profile rail
Impact-resistant	no
Clamping range D, max.	22 mm
Clamping range D, min.	16 mm
Surface addition	hot galvanised
Material addition	Steel
With counter-trough	no
Material of trough	Plastic
Material quality of trough	Polypropylene