

Technical data sheet

MCR protection for 2-pole power supply with remote signalling, 230 V AC

Item number: 5097858



Surge protection/fine power protection, type 3, to EN 61643-11 with remote signalling

- With remote signalling, potential-free changeover contact, for function monitoring
- Suitable for AC systems
- With visual function display
- With easy mounting, screwless connection terminals
- In space-saving 17.5 mm grid
- Y circuit

Application: Universal use on 35 mm DIN profile rails in any standard distributor housing.



Master data

Item number	5097858
Type	VF230-AC-FS
Description 1	Lightning barrier
Description 2	with remote signalling
Manufacturer	OBO
Dimension	230V AC
Smallest sales unit	1
Unit of quantity	Piece
Weight	6.91 kg
Weight unit	kg/100 pc.
CO2 Footprint (GWP) Cradle-to-Gate	0,8639 kg CO2e / 1 Piece


Technical data sheet

MCR protection for 2-pole power supply with remote signalling, 230 V AC

Item number: 5097858



Dimensions

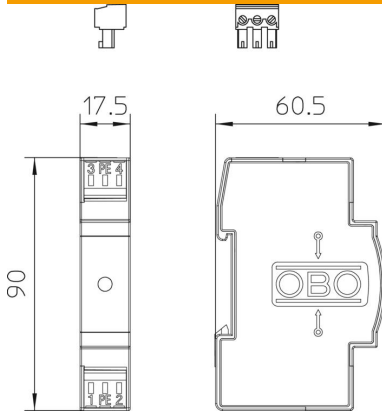

Technical data

Response time	<25 ns
Blow-out	no
Structural width in division units (division unit, 17.5 mm)	1
Operating temperature, max.	80 °C
Operating temperature, min.	-40 °C
Explosion-tested version	no
Remote signalling	yes
FM contacts	Changeover
Combined voltage protection level [L-PE]	1500 kV
Maximum continuous voltage AC	255 V
Conductor cross-section, rigid (single-wire/multiwire), max.	2.5 mm ²
Conductor cross-section, rigid (single-wire/multiwire), min.	0.14 mm ²
Lightning protection zone LPZ	2→3
Maximum discharge current (8/20 µs)	7 kA
Installation type	DIN rail 35 mm
Nominal discharge current (8/20 µs)	2.5 kA
Nominal voltage AC (50/60 Hz)	230 V
Network form	Other
OBO_Nominal load current (input/output terminal)	20 A
Pole number	3
Test class, type 3	yes
Protection rating	IP20
Protection level	≤1,0 kV
Protection level [L-N]	≤1000
Protection level [N-PE]	1.4 kV
Protection level wire-wire	<1060 V
Protection level wire-earth	<1400 V
Signalling on device	Visual
SPD to EN 61643-11	Type 3


Technical data sheet

MCR protection for 2-pole power supply with remote signalling, 230 V AC

Item number: 5097858



Technical data



SPD to IEC 61643-1	Class III
Permitted temperature range, max.	80 °C
Permitted temperature range, min.	-40 °C