


Technical data sheet

Cross-connector with intermediate plate for Rd 8–10 x Rd 16 A4

Item number: 5312346

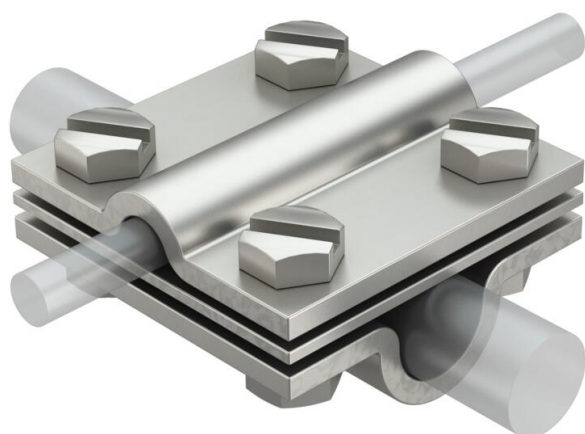

- Meets the requirements of VDE 0185-305-3 (IEC/ EN 62305-3)
- Fit: Rd 8-10 x Rd 16 / FL 30
- With adapter plate
- Mounted with 4 hexagonal bolts M8 x 25 and 4 hexagonal nuts M8



A4 Stainless steel

Master data

| | |
|------------------------------------|--------------------------|
| Item number | 5312346 |
| Type | 252 8-10x16 V4A |
| Description 1 | Cross-connectors |
| Manufacturer | OBO |
| Dimension | 8-10mm |
| Material | Stainless steel 1.4571 |
| Smallest sales unit | 10 |
| Unit of quantity | Piece |
| Weight | 39 kg |
| Weight unit | kg/100 pc. |
| CO2 Footprint (GWP) Cradle-to-Gate | 1,5643 kg CO2e / 1 Piece |


Technical data sheet

Cross-connector with intermediate plate for Rd 8–10 x Rd 16 A4


Item number: 5312346



Dimensions



| | |
|-------------|-------|
| Dimension A | 60 mm |
| Dimension B | 60 mm |



Technical data

| | |
|-------------------------------------|---------------------------------|
| Type of fastening screw | Hexagonal bolt |
| Type of connector | Cross-connectors |
| Lightning current carrying capacity | H/100 kA |
| Suitable for connection | Round conductor Rd 8-10 / Rd 16 |
| Fit | Rd 8-10 x 16 mm |
| Intermediate plate | yes |