

# Technical data sheet

## Magic straight connector set A2

Item number: 6068962



Cable tray connector with quick fastening for the screwless connection of perforated cable trays with a side height of 60 mm.  
The optimised design means that the connector can be used to create radii and as a length compensation piece for large temperature deviations.



|    |                 |
|----|-----------------|
| A2 | Stainless steel |
| 2B | Bright, treated |

### Master data

|                                    |                          |
|------------------------------------|--------------------------|
| Item number                        | 6068962                  |
| Type                               | KTSMV 620 A2             |
| Description 1                      | Straight connector set   |
| Description 2                      | for cable tray Magic     |
| Manufacturer                       | OBO                      |
| Dimension                          | 60x200x200               |
| Colour                             | stainless steel          |
| Material                           | Stainless steel 1.4301   |
| Surface                            | Bright, treated          |
| Surface standard                   |                          |
| Smallest sales unit                | 1                        |
| Unit of quantity                   | Piece                    |
| Weight                             | 37.2 kg                  |
| Weight unit                        | kg/100 pc.               |
| CO2 Footprint (GWP) Cradle-to-Gate | 3,3295 kg CO2e / 1 Piece |


# Technical data sheet

## Magic straight connector set A2

Item number: 6068962



### Dimensions

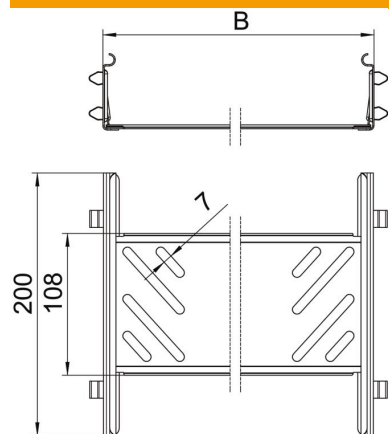

|                 |        |
|-----------------|--------|
| Dimension       | 60x200 |
| Length          | 200 mm |
| Width           | 200 mm |
| Height          | 60 mm  |
| Plate thickness | 1 mm   |
| Dimension B     | 200 mm |

### Technical data

|                                       |                     |
|---------------------------------------|---------------------|
| Version for                           | Straight connector  |
| Maintain electrical functions         | no                  |
| Suitable for mesh cable tray          | no                  |
| Suitable for cable ladder             | no                  |
| Suitable for cable tray               | yes                 |
| Suitable for cable tray system height | 60 mm               |
| Adjustable connector, horizontal      | no                  |
| Articulated connector, vertical       | no                  |
| Rustproof steel, pickled              | no                  |
| Connection type                       | Screwless connector |