

Technical data sheet

Junction box, B 11 M, with thread

Item no. 2002345



Protection rating IP54, nominal voltage 660 V, nominal cross-section 10 mm², two fastening holes for screws up to 6 mm Ø on the outside of the box, four cover screws, 10 break-out entries with thread M20 x 1.5, primarily for cable glands with short connecting thread. Clear internal dimensions: 125x100x44 mm.




UF Duroplast, Aminoplast, type 131.5

Additional product text 1 B 11 M empty: without earthing terminal

Master data

Item no.	2002345
Type	B 11 M
Description 1	Junction box
Dimension	136x111x57
Colour	Light grey
RAL number	7035
Material	Duroplast, Aminoplast, type 131.5
Material symbol	UF
Smallest sales unit (VG)	1 Piece
Weight	32,20 kg/100 pc.

Technical data

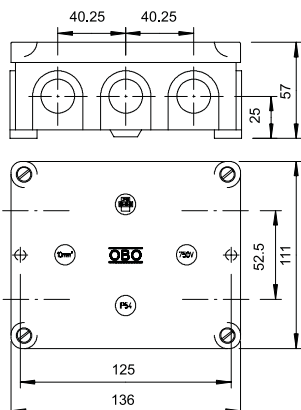

Length	111,00 mm
Width	136,00 mm
Height	57,00 mm
Clear internal dimensions	125x100x44 mm
Dimension LxWxH	111x136x57 mm
Dimension	136 x 111 x 57 mm
Expandable	☐
No. of entries	10
Type of entry	Cable
Type of housing penetration	Thread and pre-marking
Measured insulation voltage Vi	660,00 V
Cover	Not transparent
Cover fastening	Screwed
Entries	10 break-out entries with thread M20 x 1.5
Entry from rear	☐
Explosion-tested version	☐
Flame-resistant	Acc. to VDE 0471/DIN 695 Part 2-1, test temperature 750°C
Shape	Rectangular
Function maintenance (ETIM)	Without
For Ex zone	Without

Technical data sheet

Junction box, B 11 M, with thread

Item no. 2002345



Technical data

For Ex zone gas	Without
For Ex zone dust	Without
For pipe diameter	20 mm
Halogen-free	☒
With screening	☐
With cover	☒
Nominal cross section	10,00 mm ²
Nominal voltage	660,00 V
Protection rating	IP54
Sealable	☒
Impact-resistant	☐
Transparent lid	☐
Weatherproof	☐